

GLI-SLLS

Slim Linear Light Surface



Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



The GOLED Slim Linear Light Surface offers sleek, efficient illumination for commercial spaces. With an ultra-thin profile, it installs seamlessly into T-bar and drywall ceilings using a standard octagon junction box. Featuring adjustable wattage and CCT, high-efficiency LEDs, and a robust aluminum housing, this versatile light is perfect for offices, schools, and hospitals. Enjoy energy-efficient lighting with a 5-year warranty and over 50,000 hours of lifespan.

Lighting:

- High diffusion lens for comfortable light
- High CRI: Minimum 80 color rendering index
- Adjustable CCT of 3000K, 3500K, 4000K

Installation:

- Installs in a standard octagon junction box
- Works for T-bar and drywall ceilings
- Ultra-thin profile, only 0.94" thickness
- Compatible with surface mounts

Electrical:

- 20W 2', 30/23/15W 3', 40/30/20W 4', 80/60/40W 8' DIP switch selectable output
- 120V-277V-347V internal driver
- High efficiency LEDs provide 85LM/W+
- Standard 1-10V dimming which continuously dims to 10%
- Optional occupancy/daylight sensor

Details:


- Extruded aluminum housing, seamless design for superior thermal management
- Powder coated white trim
- Optional emergency 8W 120 minute backup battery

Certifications:

- cULus Listed
- 5 years warranty
- Estimated lifespan of over 50 000 hours

Dimensions:

LS Surface

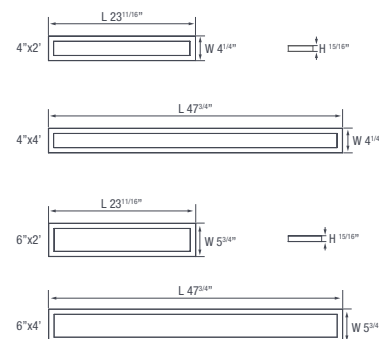

ORDERING GUIDE

SERIES	LENGTH	WIDTH	DRIVER	CCT	CONTROL	EMERGENCY
GLI-SLLS	2 - 2ft 4 - 4ft	4 - 4in 6 - 6in	ID1 - Internal Driver 110-277V ID2 - Internal Driver 110-347V	3SK¹ - 3 CCT	DM - 1-10V OS - Occupancy sensor DO - Daylight and Occupancy sensor	NE - No backup EM - Emergency backup

Notes:

1. Selectable CCTs (3000/3500/4000K)
2. Non-standard option. May be subject to additional lead time and MOQ.

SPECIFICATIONS


MODEL	LENGTH	WIDTH	WATTAGE	LUMENS	LUMENS/FOOT	LUMENS/W	CCT
GLI-SLLS-2-4	2ft	4in	20/15/10W	1700/1260/840LM	850/630/420LM/ft	85LM/W	4000K
GLI-SLLS-4-4	4ft	4in	40/30/20W	3400/2520/1680LM	850/630/420LM/ft	85LM/W	4000K
GLI-SLLS-2-6	2ft	6in	20/15/10W	1800/1340/900LM	900/670/450LM/ft	90LM/W	4000K
GLI-SLLS-4-6	4ft	6in	40/30/20W	3600/2680/1800LM	900/670/450LM/ft	90LM/W	4000K

All efficacy ratings are ±5%

INSTALLATION


LS Surface

Slim surface mount or recessed

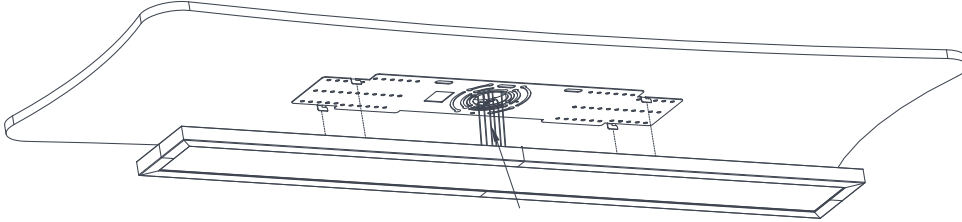


PHOTOMETRY


[↗ IES Files](#)

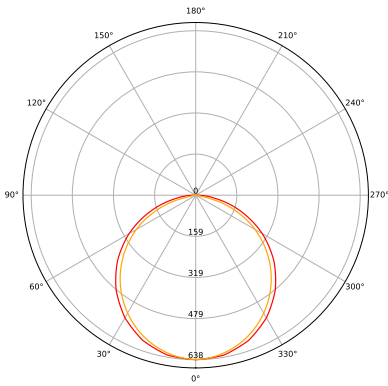


GLI-SLLS-2-4-ID1-3SK-XX-XX 3CCT@3500K		
ZONE	LUMENS	%
0-30	493	28.3%
0-40	808	46.3%
0-60	1,416	81.2%
60-90	329	18.8%
70-90	128	7.3%
90-120	0	0.0%
0-90	1,745	100.0%
90-180	0	0.0%
0-180	1,745	100.0%

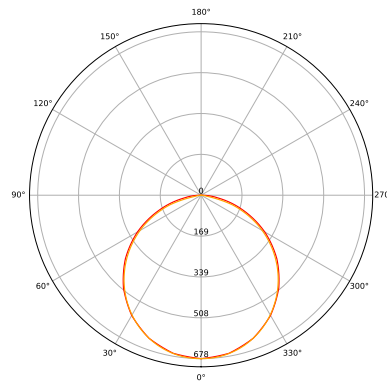

GLI-SLLS-2-6-ID1-3SK-XX-XX 3CCT@3500K		
ZONE	LUMENS	%
0-30	579	29.0%
0-40	943	47.1%
0-60	1,636	81.8%
60-90	365	18.2%
70-90	141	7.1%
90-120	0	0.0%
0-90	2,000	100.0%
90-180	0	0.0%
0-180	2,000	100.0%

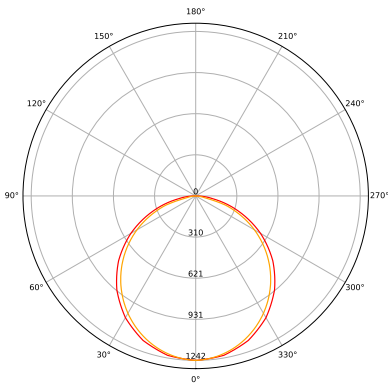

GLI-SLLS-2-6-ID1-3SK-XX-XX 3CCT@3500K		
ZONE	LUMENS	%
0-30	954	29.8%
0-40	1,550	48.5%
0-60	2,632	82.3%
60-90	566	17.7%
70-90	228	7.1%
90-120	0	0.0%
0-90	3,199	100.0%
90-180	0	0.0%
0-180	3,199	100.0%

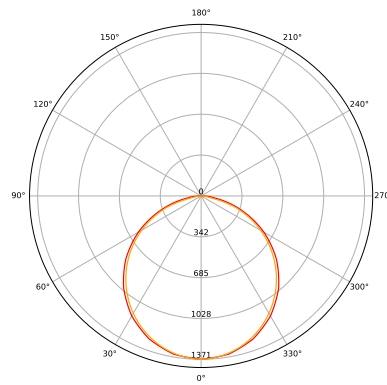

GLI-SLLS-4-6-ID1-3SK-XX-XX 3CCT@3500K		
ZONE	LUMENS	%
0-30	1,053	29.6%
0-40	1,715	48.2%
0-60	2,930	82.3%
60-90	628	17.7%
70-90	250	7.0%
90-120	0	0.0%
0-90	3,558	100.0%
90-180	0	0.0%
0-180	3,558	100.0%