

All-purpose Saucer Light

Project: _____ Location: _____ Type: _____
Model Number: _____ Qty: _____ Notes: _____ Date: _____




GLI-APSL

All-purpose Saucer Light

The GOLED All-purpose Saucer Light has a minimalist modern design that is ideal for offices, retail, and educational spaces. Premium optics eliminate glare to provide a comfortable light. The optional indirect and direct light distribution enriches the space illumination, adding dimension to the ceiling space. While having an intricate effect, the luminaire mounting as a pendant or surface is standard and efficacious.

Features and Specifications

- Modern minimalist design
- Aluminum housing
- Microprismatic lens provides glare free pleasant light
- Direct(down) and indirect(up) and direct(down) light distribution options
- Designed to work with standard octagon junction boxes
- Versatile installation options:
 - * Surface on ceilings and walls
 - * Aircraft cable pendant
 - * Stem pendant
- Available diameters 14Ø in, 18Ø in, 24Ø in, 36Ø in, 48Ø in
- Available wattages range from 23W(2000LM) to 132W(16000LM)
- Standard finishes include white, black, and nickel. Special order colors such as red, orange, yellow, green, and blue
- Compatible with 120-277VAC
- Standard TRIAC dimmer compatibility and 0-10V dimming
- Available in CCT 3000K/3500K/4000K , or field selectable CCT(3000K/3500K/4000K)
- 80CRI or 90CRI

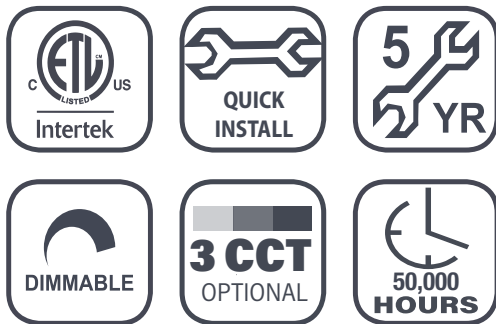

Overview

Light source	LED
Watts (W)	23W to 132W
Voltage	120-277VAC
Lumen output (LM)	2000LM to 16000LM
Efficiency (LM/W)	80-125LM/W
Color temperature (K)	3000K/3500K/4000K/3SK
CRI	80CRI, 90CRI

Certifications

- cETLus

Warranty


- 5 years warranty
- Lifespan of over 50 000 hours

All-purpose Saucer Light




▲
LOUNGE

OPEN OFFICE
▼

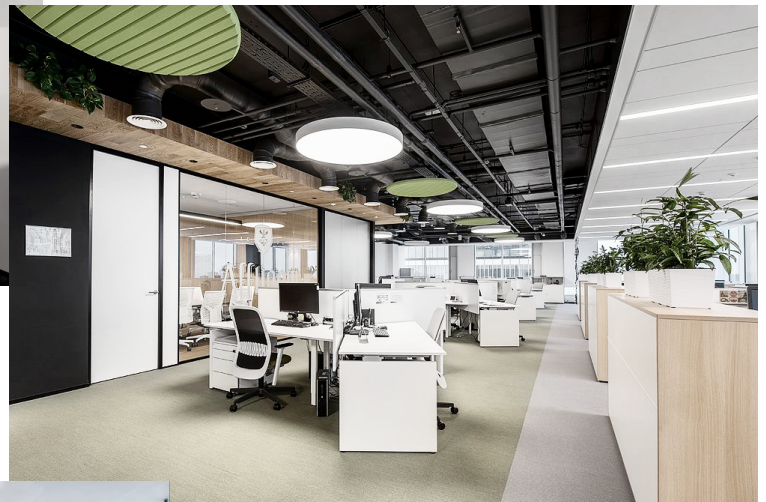


◀ LOBBY


All-purpose Saucer Light

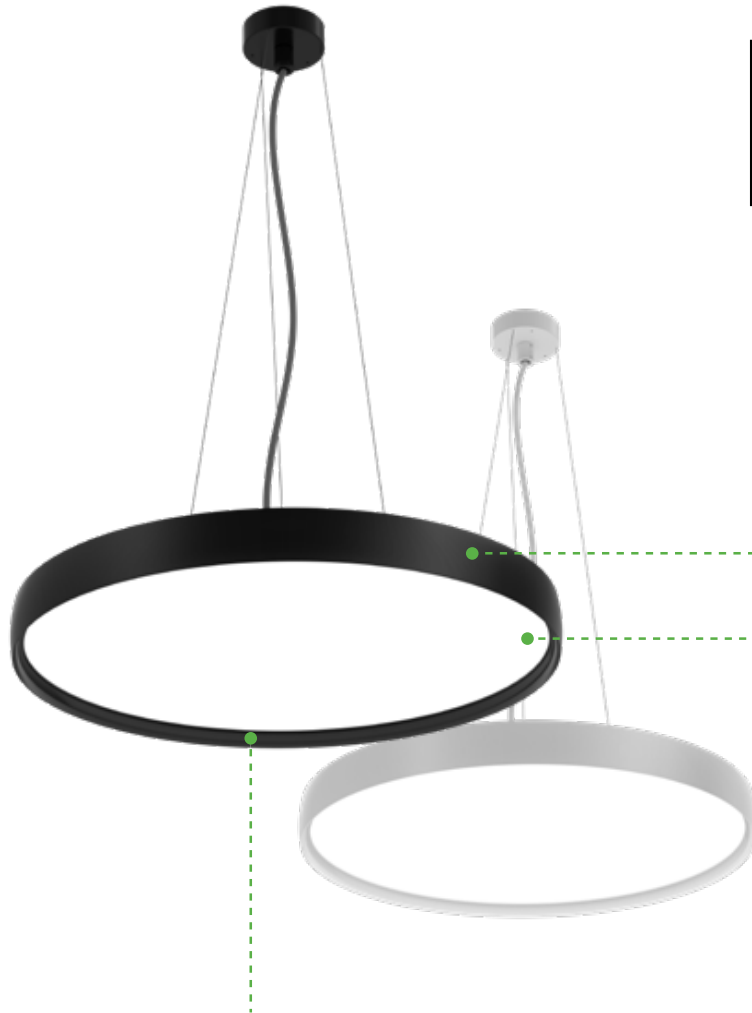

Aircraft Cable Pendant



Rod Pendant




Ceiling or Wall Mounted


70% Direct / 30% Indirect lighting distribution, High efficacy up to 120LM/W. Flicker free.

Direct light uses microprismatic lens to provide glare free pleasant light UGR<19.


Power coated finish
Available finishes:



Direct/Indirect Illumination



Indirect Light
Switchable On or Off





Aluminum shallow housing with
regressed microprismatic lens



CCT Selectable

All-purpose Saucer Light

DIMENSIONS

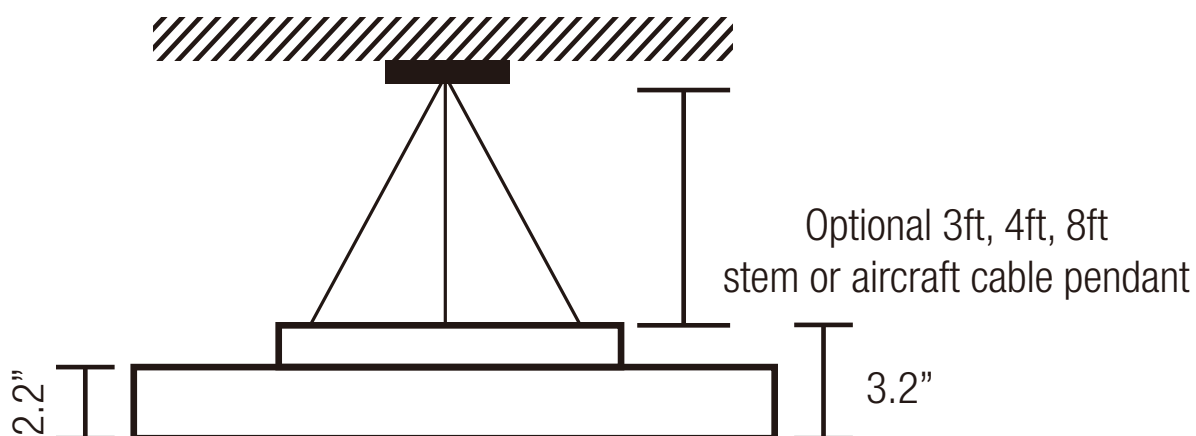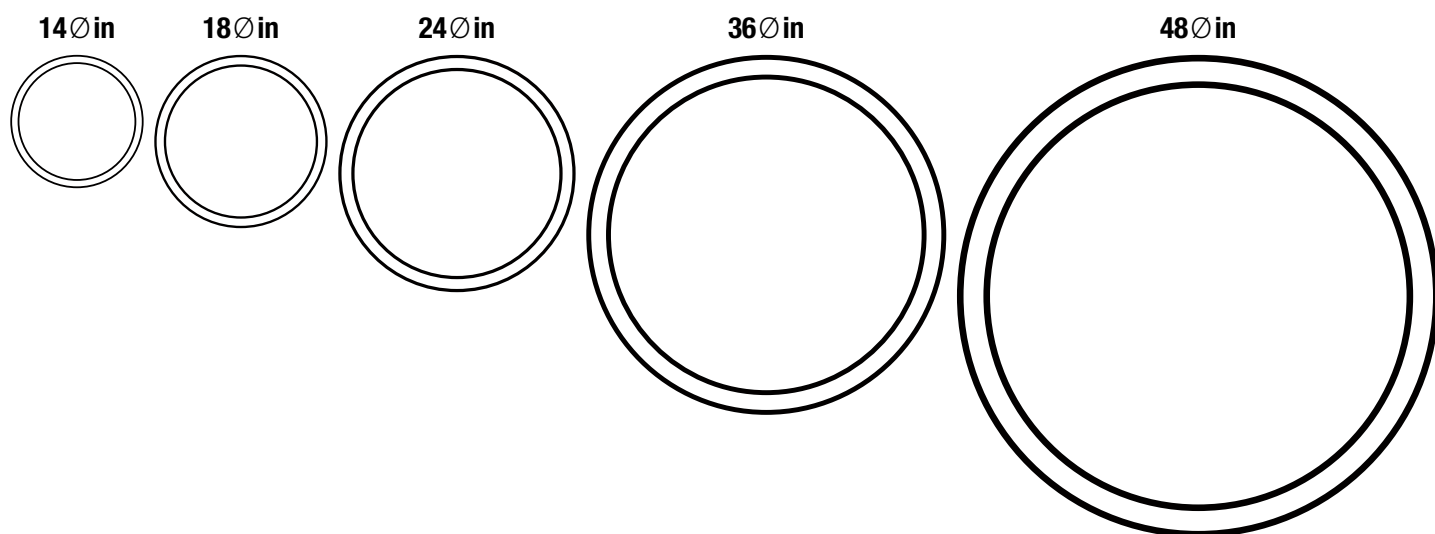

SPECIFICATIONS

CODE	DIAMETER	WATTAGE	LUMENS	LUMENS/WATT	CCT	BEAM ANGLE	CRI
GLI-APSL-DN-23W-XX	140in	23W	2000LM ↓	90LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-23W-3SK	140in	23W	2000LM ↓	80-90LM/W	CCT Selectable	↓90°	80+
GLI-APSL-DN-28W-XX	180in	28W	2800LM ↓	100LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-28W-3SK	180in	28W	2800LM ↓	90-100LM/W	CCT Selectable	↓90°	80+
GLI-APSL-DN-40W-XX	180in	40W	4000LM ↓	100LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-40W-3SK	180in	40W	4000LM ↓	90-100LM/W	CCT Selectable	↓90°	80+
GLI-APSL-DN-48W-XX	240in	48W	5200LM ↓	110LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-48W-3SK	240in	48W	5200LM ↓	100-110LM/W	CCT Selectable	↓90°	80+
GLI-APSL-DN-62W-XX	240in	62W	6800LM ↓	110LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-62W-3SK	240in	62W	6800LM ↓	100-110LM/W	CCT Selectable	↓90°	80+
GLI-APSL-DN-80W-XX	360in	80W	9000LM ↓	115LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-80W-3SK	360in	80W	9000LM ↓	105-115LM/W	CCT Selectable	↓90°	80+
GLI-APSL-DN-100W-XX	360in	100W	11500LM ↓	115LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-100W-3SK	360in	100W	11500LM ↓	105-115LM/W	CCT Selectable	↓90°	80+
GLI-APSL-DN-108W-XX	480in	108W	13000LM ↓	125LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-108W-3SK	480in	108W	13000LM ↓	115-125LM/W	CCT Selectable	↓90°	80+
GLI-APSL-DN-132W-XX	480in	132W	16000LM ↓	125LM/W ±5%	CCT Fixed	↓90°	80+
GLI-APSL-DN-132W-3SK	480in	132W	16000LM ↓	115-125LM/W	CCT Selectable	↓90°	80+
GLI-APSL-UD-28W-XX	140in	28W	700LM ↓ + 1800LM ↑	90LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-28W-3SK	140in	28W	700LM ↓ + 1800LM ↑	80-90LM/W	CCT Selectable	↓90° ↑120°	80+
GLI-APSL-UD-40W-XX	180in	40W	1200LM ↓ + 2800LM ↑	100LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-40W-3SK	180in	40W	1200LM ↓ + 2800LM ↑	90-100LM/W	CCT Selectable	↓90° ↑120°	80+
GLI-APSL-UD-50W-XX	180in	50W	1500LM ↓ + 3500LM ↑	100LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-50W-3SK	180in	50W	1500LM ↓ + 3500LM ↑	90-100LM/W	CCT Selectable	↓90° ↑120°	80+
GLI-APSL-UD-54W-XX	240in	54W	1800LM ↓ + 4200LM ↑	110LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-54W-3SK	240in	54W	1800LM ↓ + 4200LM ↑	100-110LM/W	CCT Selectable	↓90° ↑120°	80+
GLI-APSL-UD-62W-XX	240in	62W	2000LM ↓ + 4800LM ↑	110LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-62W-3SK	240in	62W	2000LM ↓ + 4800LM ↑	100-110LM/W	CCT Selectable	↓90° ↑120°	80+
GLI-APSL-UD-100W-XX	360in	100W	3500LM ↓ + 8000LM ↑	115LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-100W-3SK	360in	100W	3500LM ↓ + 8000LM ↑	105-115LM/W	CCT Selectable	↓90° ↑120°	80+
GLI-APSL-UD-123W-XX	360in	123W	4200LM ↓ + 10000LM ↑	115LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-123W-3SK	360in	123W	4200LM ↓ + 10000LM ↑	105-115LM/W	CCT Selectable	↓90° ↑120°	80+
GLI-APSL-UD-114W-XX	480in	114W	4000LM ↓ + 9600LM ↑	125LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-114W-3SK	480in	114W	4000LM ↓ + 9600LM ↑	115-125LM/W	CCT Selectable	↓90° ↑120°	80+
GLI-APSL-UD-132W-XX	480in	132W	4700LM ↓ + 11000LM ↑	125LM/W ±5%	CCT Fixed	↓90° ↑120°	80+
GLI-APSL-UD-132W-3SK	480in	132W	4700LM ↓ + 11000LM ↑	115-125LM/W	CCT Selectable	↓90° ↑120°	80+

All-purpose Saucer Light

ORDERING GUIDE

SERIES	LIGHT DISTRIBUTION	WATTAGE/DIAMETER	CCT	CRI	CONTROL	FINISH
GLI-APSL						
DN - Down		23W - 23 Watts 14Øin	30K - 3000K	80C - 80CRI	DM - 0-10V	WH - White
		28W - 28 Watts 18Øin	35K - 3500K	90C - 90CRI	TR - Standard TRIAC	BK - Black
		40W - 40 Watts 18Øin	40K - 4000K		NC - No control	SI - Silver
		48W - 48 Watts 24Øin	3SK - 3CCT select			RD - Red
		62W - 62 Watts 24Øin				OR - Orange
		80W - 80 Watts 36Øin				YL - Yellow
		100W - 100 Watts 36Øin				GN - Green
		108W - 108 Watts 48Øin				BL - Blue
UD - Up and Down		132W - 132 Watts 48Øin				
		28W - 28 Watts 14Øin				
		40W - 40 Watts 18Øin				
		50W - 50 Watts 18Øin				
		54W - 54 Watts 24Øin				
		62W - 62 Watts 24Øin				
		100W - 100 Watts 36Øin				
		123W - 123 Watts 36Øin				
		114W - 114 Watts 48Øin				
		132W - 132 Watts 48Øin				

INSTALLATION

- SM** - Surface mount
- AM3** - Aircraft cable mount 3'
- AM4** - Aircraft cable mount 4'
- AM8** - Aircraft cable mount 8'
- PM3** - Stem pendant mount 3'
- PM4** - Stem pendant mount 4'
- PM8** - Stem pendant mount 8'