


Slim Flush Mount Disk

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____

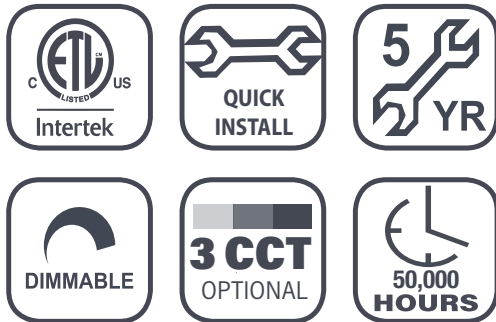

Overview

Light source	LED
Watts (W)	6W, 12W, 18W, 24W
Voltage	120V
Lumen output (LM)	400LM, 900LM, 1450LM, 2000LM
Efficiency (LM/W)	67LM/W, 75LM/W, 81LM/W, 83LM/W
Color temperature (K)	Field selectable 5CCT
CRI	80+ CRI

GLI-SFMD

Slim Flush Mount Disk

The GOLED Slim Flush Mount Disk offers optimal value for a wide variety of applications. Designed for fast installation and built to last, these luminaires are equipped with a high diffusion lens, the latest generation of powerful LED chips providing high lumen output and up to 70% energy savings compared to standard CFL light bulbs. Virtually flush below the ceiling; it is excellent for low clearance applications. In regular applications it gives the impression of a more spacious space.

Features and Specifications

- Ultra slim disc is virtually flush with ceiling
- Aluminum heat sink enhances lifetime of all components
- Uniform light distribution without visible shadows or LED hot spots
- Can be installed in standard octagon lighting box or as retrofit
- Dimensions: 5 15/32", 6 15/32", 8 17/32", 11 1/2"
- Available in 6W(400LM), 12W(900LM), 18W(1450LM), and 24W(2000LM)
- Compatible with standard TRIAC dimmer
- White fixture with optional polished chrome, matte black, and satin nickel trim rings
- Field selectable 5CCT (2700/3000/3500/4000/5000)
- 110° beam angle
- 80+ CRI

Certifications

- cETLus Classified

Warranty

- 5 years warranty
- Lifespan of over 50 000 hours


Slim Flush Mount Disk

DIMENSIONS


UNITS: mm

in


6W Fixture

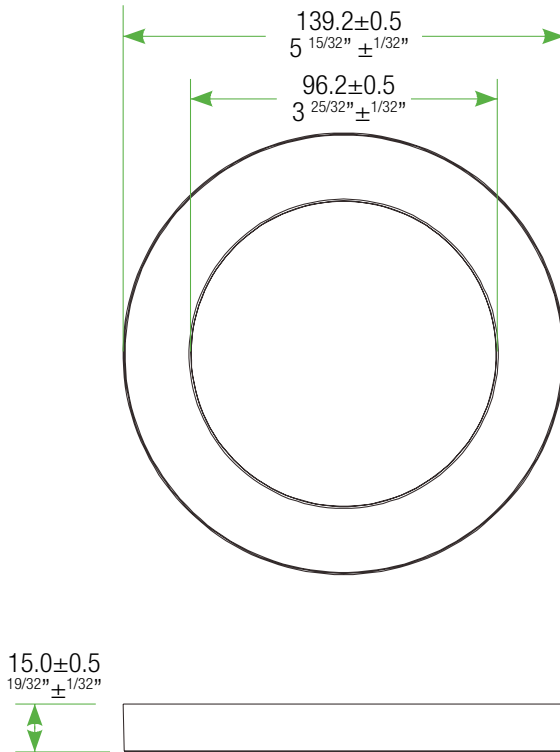


6W Trim ring

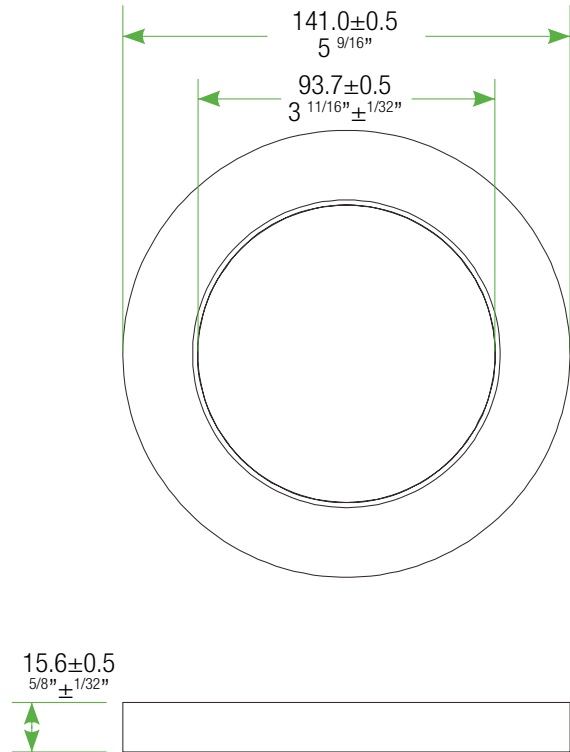

12W Fixture

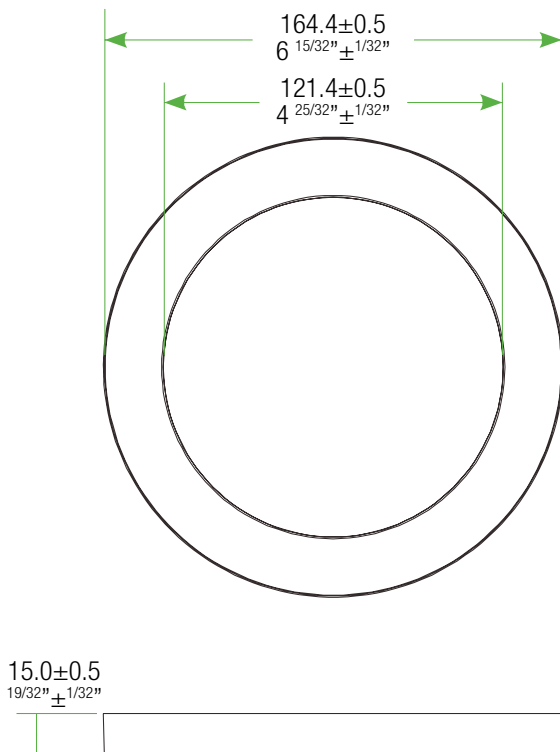

12W Trim ring

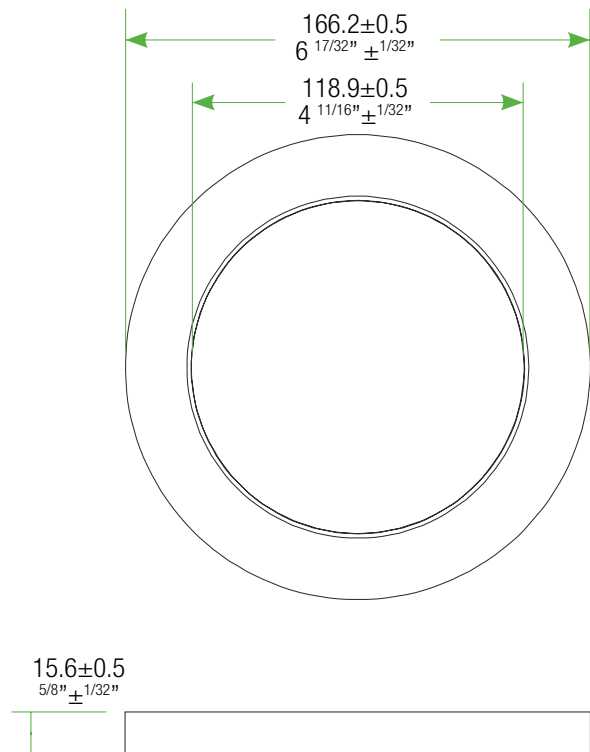


Slim Flush Mount Disk

DIMENSIONS

UNITS: mm

in


18W Fixture

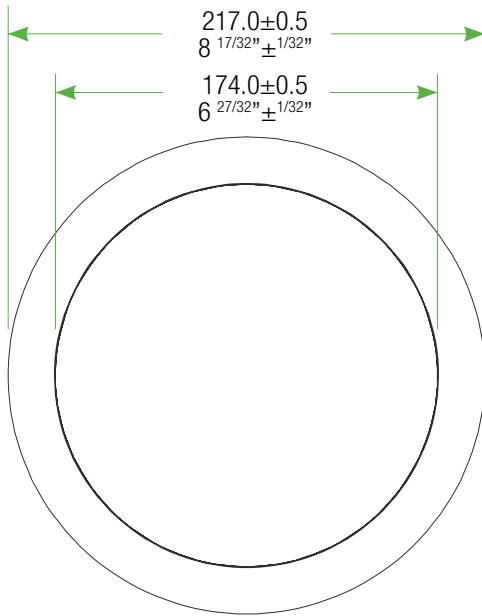

15.0 ± 0.5
 $\frac{19}{32}'' \pm \frac{1}{32}''$




18W Trim ring

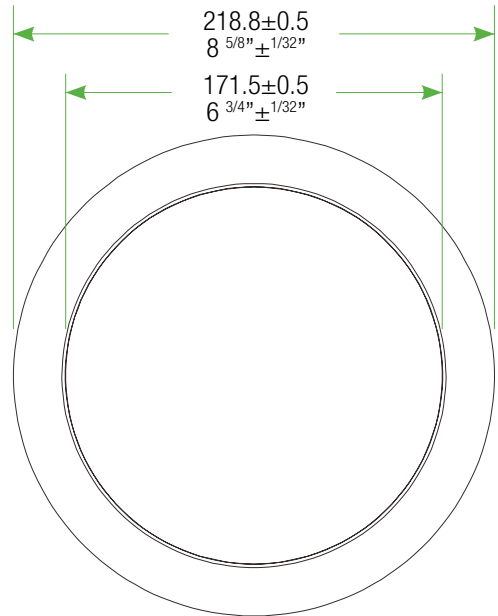

15.6 ± 0.5
 $\frac{5}{8}'' \pm \frac{1}{32}''$




24W Fixture

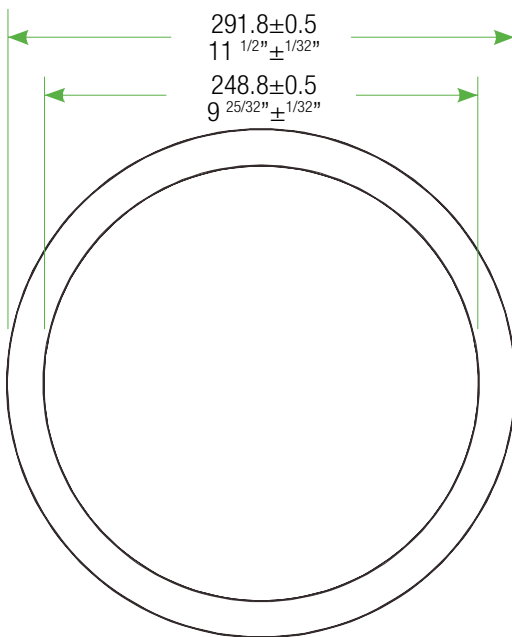

15.0 ± 0.5
 $\frac{19}{32}'' \pm \frac{1}{32}''$



24W Trim ring

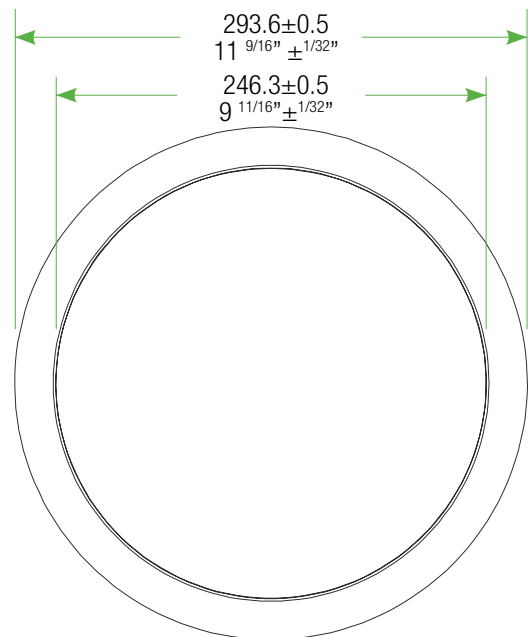


15.6 ± 0.5
 $\frac{5}{8}'' \pm \frac{1}{32}''$



Slim Flush Mount Disk

FEATURES

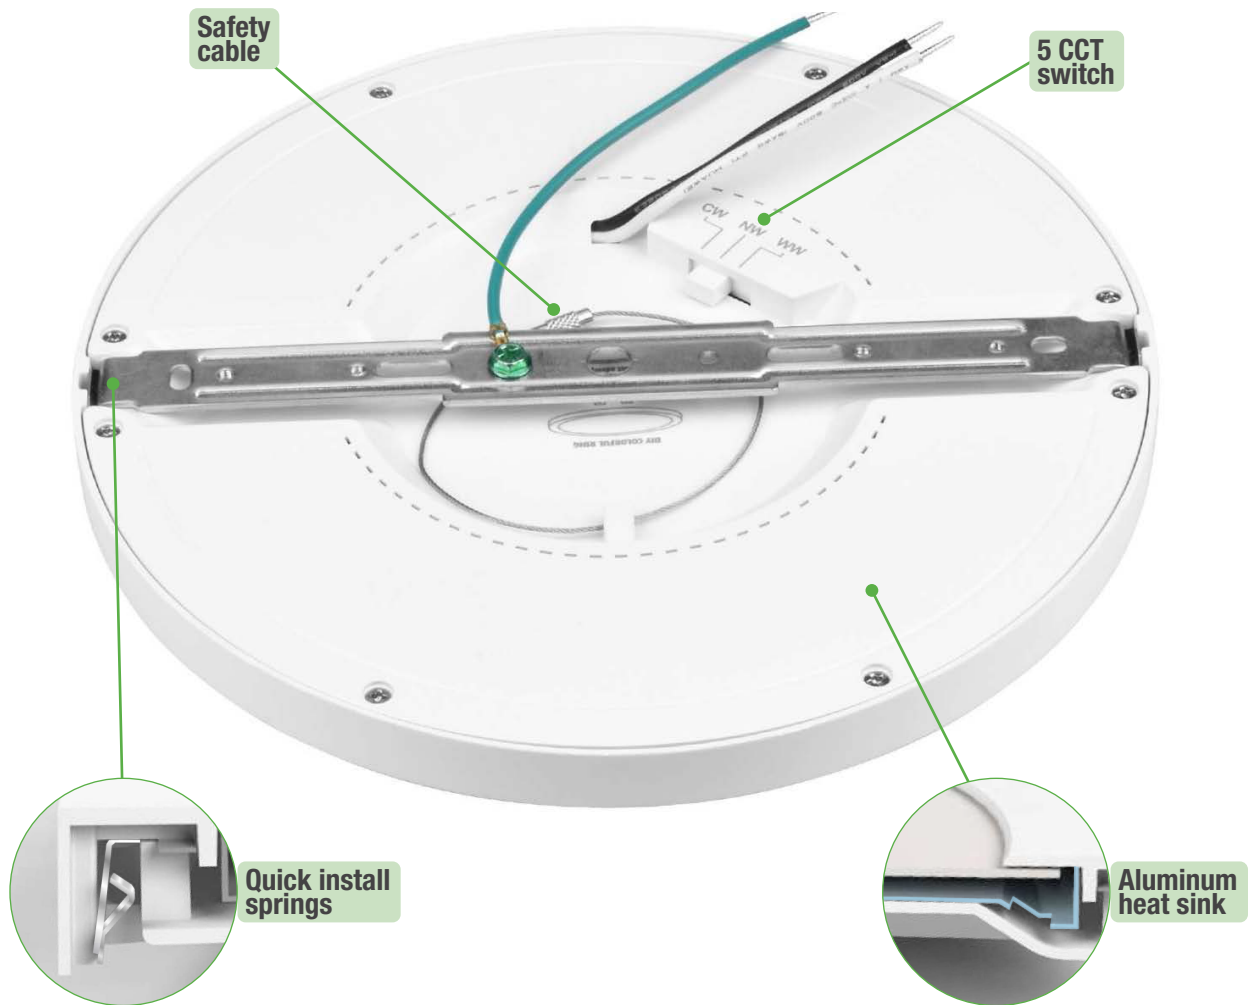

JB Installation



Retrofit



Trim Rings



Slim Flush Mount Disk

SPECIFICATIONS

CODE	WATTAGE	DIAMETER	LUMENS	LUMENS/WATT	BEAM ANGLE	CCT	CRI	RATED LIFETIME
GLI-SFMD-6	6W	5 15/32"	400LM	67LM/W	110°	2700K	80+	50 000 hours
GLI-SFMD-12	12W	6 15/32"	900LM	75LM/W	110°	3000K	80+	50 000 hours
GLI-SFMD-18	18W	8 17/32"	1450LM	81LM/W	110°	3500K	80+	50 000 hours
GLI-SFMD-24	24W	11 1/2"	2000LM	83LM/W	110°	4000K	80+	50 000 hours
						5000K	80+	50 000 hours

ORDERING GUIDE

SERIES	WATTAGE/DIAMETER	TRIM RING	INSTALLATION
GLI-SFMD			
	6 - 6W 5 15/32"	WH - White	JB - Junction box
	12 - 12W 6 15/32"	MB - Matte black	RF - Retrofit
	18 - 18W 8 17/32"	SN - Satin nickel	
	24 - 24W 11 1/2"	PC - Polished chrome	