

Bollard Light D

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



Overview

Light source	LED
Watts (W)	10W, 20W, 35W
Voltage	100-277V AC
Lumen output (LM)	1210LM, 1900LM, 3325LM
Efficiency (LM/W)	95LM/W, 121LM/W
Color temperature (K)	3000K, 4000K, 6000K
CRI	80CRI

GLI-BLLD

Bollard Light

Heavy-cast aluminum housing designed with modern aesthetics in mind. The architectural luminaire provides brilliant illumination to walkways and other outdoor spaces, improving the visibility, safety, and overall look of any outdoor area.

Features and Specifications

- Heavy duty corrosion resistant aluminum construction
- Thermoset powder coat finish provides superior resistance to corrosion and weathering
- Uniform light distribution from hidden light emitter prevents dazzling pedestrians or vehicles
- Impact resistant tempered glass lens
- 120v-277V driver
- 10W, 20W and 25W versions
- Available in 24in, 32in, 36in and 42in heights
- Choice of 3000K, 4000K, and 6000K
- Available finishes: black, gray, mineral bronze, silver, white
- 80CRI
- Concrete installation hardware included
- Optional 0-10V dimming
- Optional base receptacle


Certifications

- cETLus
- IP65

Warranty

- 5-year limited warranty
- Life Minimum 50,000h

DIMENSIONS

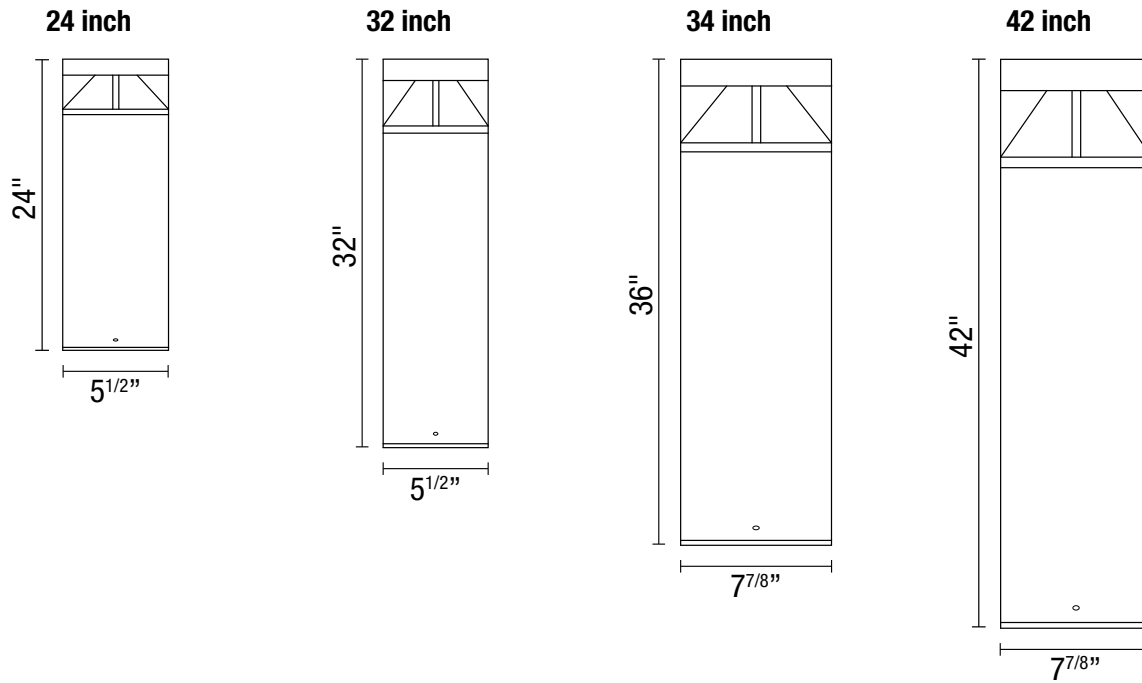

SPECIFICATIONS

CODE	WATTAGE	LUMENS	LUMENS/WATT	HEIGHT	DIAMETER	CCT	RATED LIFETIME
GLI-BLLD-10-24	10W	1210LM	121LM/W	24in	5 ^{1/2} in	3000K 4000K 6000K	50 000 hours
GLI-BLLD-10-32	10W	1210LM	121LM/W	32in	5 ^{1/2} in		50 000 hours
GLI-BLLD-20-36	20W	1900LM	95LM/W	36in	7 ^{7/8} in		50 000 hours
GLI-BLLD-35-36	35W	3325LM	95LM/W	36in	7 ^{7/8} in		50 000 hours
GLI-BLLD-35-42	35W	3325LM	95LM/W	42in	7 ^{7/8} in		50 000 hours

ORDERING GUIDE

SERIES	WATTAGE	HEIGHT	CCT	CONTROL	FINISH	OPTIONS
GLI-BLLD						APPEND REQUIRED CODES
	10W - 10 Watts	24 - 24in	30K - 3000K	NC - No control	BK - Black	MG - Marine grade hardware
		32 - 32in	40K - 4000K	DM - 0-10V	GY - Gray	RC - Receptacle
	20W - 20 Watts	36 - 36in	50K - 6000K		WH - White	
	35W - 35 Watts	36 - 36in			SI - Silver	
		42 - 42in			MB - Mineral Bronze	