

# Canopy Light A

Project: \_\_\_\_\_ Location: \_\_\_\_\_ Type: \_\_\_\_\_  
Model Number: \_\_\_\_\_ Qty: \_\_\_\_\_ Notes: \_\_\_\_\_ Date: \_\_\_\_\_



## GLI-CPLA

### Canopy Light A

The new Canopy Light A from GoLED combines energy efficiency and durability in a rugged, aluminum alloy enclosure, providing uniform illumination at an impressive 150 lumens per Watt. Installation is an easy process, with multiple mounting options, making it ideal for a variety of applications such as indoor parking garages, stairs, and service corridors. The GoLED Canopy Light A is the optimum choice for retrofitting H.I.D. or fluorescent light fixtures.

### Features and Specifications

- Aluminum alloy construction
- Powder coated finish
- Rugged polycarbonate lens
- Low profile construction
- Ceiling or pipe suspension installation
- Wide operating temperature range, -30°C to +50°C
- Industry leading efficiency of 150LM/W
- Constant current driver
- 1-10V dimming control
- 4kV line-line and 6kV line-ground surge protection
- Optional motion sensors (Microwave Sensor/PIR Sensor)
- Optional battery back-up

### Certifications

- cULus Listed
- RoHS
- IP65 waterproof rating

### Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours




### Overview


Light source	LED
Watts (W)	40W, 60W
Voltage	120V-277V, 277V-480V
Lumen output (LM)	6000LM, 9000LM
Color temperature (K)	4000K, 5000K
CRI	70CRI

# Canopy Light A

## DIMENSIONS

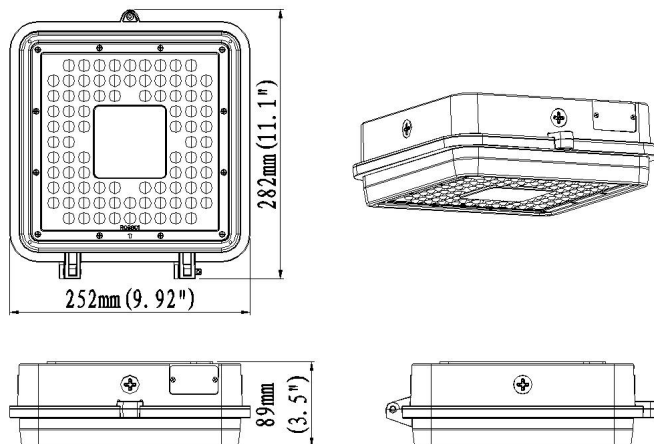

## PHOTOMETRY

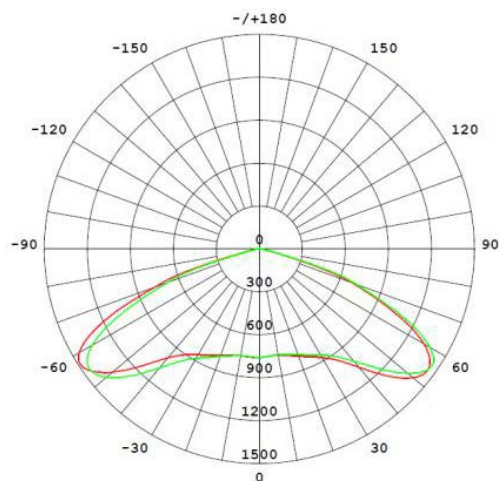

## SPECIFICATIONS

MODEL	WATTAGE	LUMENS	LUMENS/WATT	CCT	CRI	RATED LIFETIME
GLI-CPLA-40	40W	6000LM	150LM/W	4000K	70CRI	50 000 hours
GLI-CPLA-60	60W	9000LM	150LM/W	5000K	70CRI	50 000 hours

## ORDERING GUIDE

SERIES	WATTAGE	VOLTAGE	CCT	INSTALLATION	OPTIONS (120V-277V only)
<b>GLI-CPLA</b>					
	<b>40</b> - 40 Watts	<b>VU</b> - 120V-277V	<b>40K</b> - 4000K	<b>CM</b> - Ceiling mount	<b>EM</b> - Emergency battery back-up
	<b>60</b> - 60 Watts	<b>VH</b> - 277V-480V	<b>50K</b> - 5000K	<b>PM</b> - Pipe mount	<b>MS</b> - Microwave motion sensor
					<b>PS</b> - PIR sensor
					<b>MR</b> - Microwave motion sensor with remote control