

Canopy Lights B

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



Overview

Light source	LED
Voltage	120V-277V
Watts (W)	4W, 11W, 15W, 20W, 24W, 30W, 40
Color temperature (K)	3000K, 4000K, 6000K
CRI	80CRI

GLI-CPLB

Canopy Lights B

The GOLED Canopy Lights B series is a robust and contemporary lighting solution crafted for both indoor and outdoor installations. With versatile options for pendant or surface mounting, it finds applications in architectural, corridor, and pillar lighting. Engineered for durability, its enhanced weather protection guarantees long-term performance without succumbing to weathering effects.

Features and Specifications

- Die cast aluminum construction
- Stainless steel hardware
- Impact resistant PMMA lens
- Surface or 3 foot pendant installation
- 3mils AkzoNobel Powder Coating finish provides superior resistance to corrosion and weathering
- 0-10V dimming available
- 120V-277V integrated driver
- Selection of 3000K, 4000K and 6000K available
- 80CRI

Certifications

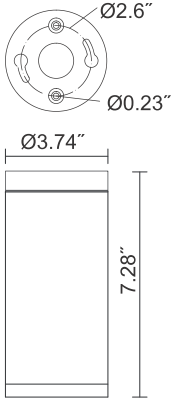
- cETLus Listed
- Damp and wet location certified
- IP65 water ingress rating
- Outdoor use

Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours

Canopy Lights B

Round downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.

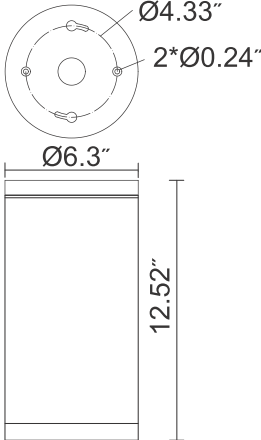
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-CPLB-6001 		WATTAGE	4W
		LUMENS 10° BEAM	226LM 57LM/W
		LUMENS 25° BEAM	208LM 52LM/W
		LUMENS 45° BEAM	201LM 50LM/W
		LUMENS 60° BEAM	165LM 41LM/W
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		LENS	Clear Tempered Glass
		SURFACE FINISH	AkzoNobel Powder Coating
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277VAC
		AMBIENT TEMPERATURE	-20°C~45°C
		CERTIFICATIONS	cETLus
		RATINGS	IP65

ORDERING GUIDE

SERIES	WATTAGE	CCT	BEAM ANGLE	COLOR	OPTIONS
GLI-CPLB-6001					APPEND REQUIRED CODES
	4 - 4 Watts	30K - 3000K	10 - 10°	BK - Black	P - Pendant mount 3' cable
		40K - 4000K	25 - 25°	WH - White	M - Marine ambient corrosion resistance
		60K - 6000K	45 - 45°	GR - Gray	O - Mounting plate for standard outlet box
			60 - 60°	MB - Mineral bronze	
				SI - Silver	

Canopy Lights B

Round downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.

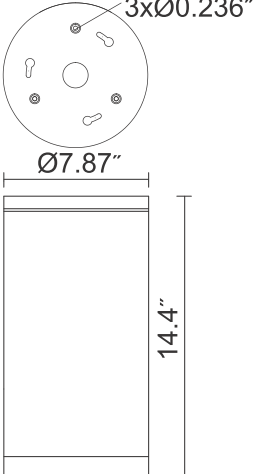
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-CPLB-6013		WATTAGE	11W, 30W
		LUMENS 11W 10° BEAM	599LM 54LM/W
		LUMENS 11W 25° BEAM	415LM 38LM/W
		LUMENS 11W 45° BEAM	659LM 60LM/W
		LUMENS 11W 60° BEAM	674LM 61LM/W
		LUMENS 30W 10° BEAM	2283LM 76LM/W
		LUMENS 30W 20° BEAM	2252LM 75LM/W
		LUMENS 30W 30° BEAM	2213LM 74LM/W
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		LENS	Clear Tempered Glass
		SURFACE FINISH	AkzoNobel Powder Coating
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277VAC
		AMBIENT TEMPERATURE	-20°C~45°C
		CERTIFICATIONS	cETLus
		RATINGS	IP65

ORDERING GUIDE

SERIES	WATTAGE	CCT	BEAM ANGLE	COLOR	OPTIONS
GLI-CPLB-6013					APPEND REQUIRED CODES
	11 - 11 Watts	30K - 3000K	10 - 10°	BK - Black	P - Pendant mount 3' cable
		40K - 4000K	25 - 25°	WH - White	M - Marine ambient corrosion resistance
		60K - 6000K	45 - 45°	GR - Gray	O - Mounting plate for standard outlet box
			60 - 60°	MB - Mineral bronze	DM - 0-10V Dimming
				SI - Silver	
	30 - 30 Watts	30K - 3000K	10 - 10°	BK - Black	P - Pendant mount 3' cable
		40K - 4000K	20 - 20°	WH - White	M - Marine ambient corrosion resistance
		50K - 5000K	30 - 30°	GR - Gray	O - Mounting plate for standard outlet box
				MB - Mineral bronze	DM - 0-10V Dimming
				SI - Silver	

Canopy Lights B

Round downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.

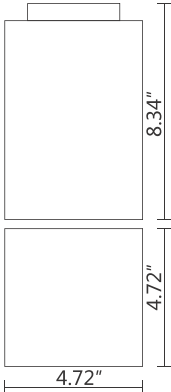
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-CPLB-6020 		WATTAGE	24W, 40W
		LUMENS 24W 10° BEAM	61LM/W
		LUMENS 24W 25° BEAM	56LM/W
		LUMENS 24W 38° BEAM	46LM/W
		LUMENS 24W 45° BEAM	47LM/W
		LUMENS 24W 60° BEAM	27LM/W
		LUMENS 40W 8° BEAM	85LM/W
		LUMENS 40W 18° BEAM	78LM/W
		LUMENS 40W 36° BEAM	80LM/W
		LUMENS 40W 62° BEAM	77LM/W
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		LENS	Clear Tempered Glass
		SURFACE FINISH	AkzoNobel Powder Coating
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277VAC
		AMBIENT TEMPERATURE	-20°C~45°C
		CERTIFICATIONS	cETLus
		RATINGS	IP65

ORDERING GUIDE

SERIES	WATTAGE	CCT	BEAM ANGLE	COLOR	OPTIONS
GLI-CPLB-6020					APPEND REQUIRED CODES
24 - 24 Watts	30K - 3000K	10 - 10°	BK - Black	P - Pendant mount 3' cable	
					M - Marine ambient corrosion resistance
					O - Mounting plate for standard outlet box
					DM - 0-10V Dimming
40 - 40 Watts	30K - 3000K	08 - 8°	BK - Black	P - Pendant mount 3' cable	
					M - Marine ambient corrosion resistance
					O - Mounting plate for standard outlet box
					DM - 0-10V Dimming
40 - 40 Watts	40K - 4000K	18 - 18°	WH - White	M - Marine ambient corrosion resistance	
					O - Mounting plate for standard outlet box
					DM - 0-10V Dimming
40 - 40 Watts	50K - 5000K	36 - 36°	GR - Gray	O - Mounting plate for standard outlet box	
					DM - 0-10V Dimming
40 - 40 Watts	60K - 6000K	38 - 38°	MB - Mineral bronze	DM - 0-10V Dimming	
40 - 40 Watts	60K - 6000K	60 - 60°	SI - Silver	DM - 0-10V Dimming	

Canopy Lights B

Square downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.


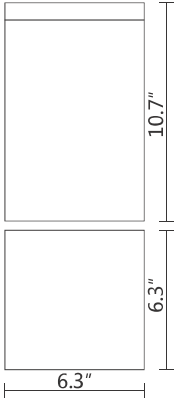
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-CPLB-6162	  Mounted Top plate 	WATTAGE	4W, 15W
HOUSING		Die-Cast Aluminum	
GASKET		Silicone Rubber	
TOP COVER		Clear Tempered Glass	
LED OPTIC		PMMA Lens	
SURFACE FINISH		AkzoNobel Powder Coating	
DRIVER TYPE		Constant Current	
INPUT VOLTAGE		100~277V/AC	
AMBIENT TEMPERATURE		-20°C~45°C	
CERTIFICATIONS		cETLus	
RATINGS	IP65		

ORDERING GUIDE

SERIES	WATTAGE	CCT	BEAM ANGLE	COLOR	OPTIONS
GLI-CPLB-6162					APPEND REQUIRED CODES
	4 - 4 Watts	30K - 3000K	15 - 15°	BK - Black	P - Pendant mount 3' cable
		40K - 4000K	23 - 23°	WH - White	M - Marine ambient corrosion resistance
		50K - 5000K	45 - 45°	GR - Gray	O - Mounting plate for standard outlet box
			60 - 60°	MB - Mineral bronze	
				SI - Silver	
	15 - 15 Watts	30K - 3000K	15 - 15°	BK - Black	P - Pendant mount 3' cable
		40K - 4000K	20 - 20°	WH - White	M - Marine ambient corrosion resistance
		50K - 5000K	30 - 30°	GR - Gray	O - Mounting plate for standard outlet box
			60 - 60°	MB - Mineral bronze	DM - 0-10V Dimming
				SI - Silver	

Canopy Lights B

Square downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.


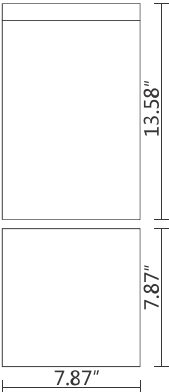
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-CPLB-6163	  Mounted Top plate 	WATTAGE	11W, 15W, 30W
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		TOP COVER	Clear Tempered Glass
		LED OPTIC	PMMA Lens
		SURFACE FINISH	AkzoNobel Powder Coating
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		CERTIFICATIONS	cETLus
		RATINGS	IP65

ORDERING GUIDE

SERIES	WATTAGE	CCT	BEAM ANGLE	COLOR	OPTIONS
GLI-CPLB-6163					APPEND REQUIRED CODES
	11 - 11 Watts	30K - 3000K	15 - 15°	BK - Black	P - Pendant mount 3' cable
	15 - 15 Watts	40K - 4000K	23 - 23°	WH - White	M - Marine ambient corrosion resistance
		50K - 5000K	38 - 38°	GR - Gray	O - Mounting plate for standard outlet box
			45 - 45°	MB - Mineral bronze	
			60 - 60°	SI - Silver	
	30 - 30 Watts	30K - 3000K	15 - 15°	BK - Black	P - Pendant mount 3' cable
		40K - 4000K	20 - 20°	WH - White	M - Marine ambient corrosion resistance
		50K - 5000K	30 - 30°	GR - Gray	O - Mounting plate for standard outlet box
			60 - 60°	MB - Mineral bronze	DM - 0-10V Dimming
				SI - Silver	

Canopy Lights B

Square downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-CPLB-6169	  3xØ0.236" Mounted Top plate  13.58" 7.87" 7.87"	WATTAGE	20W, 40W
HOUSING		Die-Cast Aluminum	
GASKET		Silicone Rubber	
TOP COVER		Clear Tempered Glass	
LED OPTIC		PMMA Lens	
SURFACE FINISH		AkzoNobel Powder Coating	
DRIVER TYPE		Constant Current	
INPUT VOLTAGE		100~277V/AC	
AMBIENT TEMPERATURE		-20°C~45°C	
CERTIFICATIONS		cETLus	
RATINGS		IP65	

ORDERING GUIDE

SERIES	WATTAGE	CCT	BEAM ANGLE	COLOR	OPTIONS
GLI-CPLB-6169					APPEND REQUIRED CODES
	20 - 20 Watts	30K - 3000K	15 - 15°	BK - Black	P - Pendant mount 3' cable
		40K - 4000K	23 - 23°	WH - White	M - Marine ambient corrosion resistance
		50K - 5000K	38 - 38°	GR - Gray	O - Mounting plate for standard outlet box
			45 - 45°	MB - Mineral bronze	DM - 0-10V Dimming
			60 - 60°	SI - Silver	
	40 - 40 Watts	30K - 3000K	08 - 8°	BK - Black	P - Pendant mount 3' cable
		40K - 4000K	18 - 18°	WH - White	M - Marine ambient corrosion resistance
		50K - 5000K	36 - 36°	GR - Gray	O - Mounting plate for standard outlet box
			62 - 62°	MB - Mineral bronze	DM - 0-10V Dimming
				SI - Silver	