

Slim Profile Canopy Light

Project: _____ Location: _____ Type: _____
Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-LCL

Slim Profile Canopy Light

The GoLED Slim Profile Canopy Light combines the latest LED technology and high quality materials in a sleek package, delivering bright, uniform light with impressive luminous efficacy of up to 150LM/W. With an estimated lifespan of over 54,000 hours, this low maintenance and budget friendly light fixture is waterproof, making it suitable for a variety of outdoor applications.

Features and Specifications

- Durable die-cast aluminum with optimal heat dissipation properties
- High grade Polycarbonate & glass lens
- Simple installation procedure
- Low glare, no flicker LED module - easy on the eyes.
- Estimated lifespan: >54,000 hours
- High power factor of 92% and excellent CRI of 80Ra.
- Color temperatures available: 3000K, 4000K, 5000K, 5700K, 6500K
- Wide choice of wattage and lumens output options: 75W, 100W, 130W, 150W delivering 9000LM to 22500LM

Certifications

- cETLus Listed
- IP65 water ingress rating
- DLC (120LM/W)
- RoHS

Warranty

- 5 years warranty
- Estimated lifespan of over 54 000 hours





Overview

Light source	LED
Watts (W)	120V-277V
Voltage	75W, 100W, 130W, 150W
Lumen output (LM)	9000LM to 22500LM
Efficiency (LM/W)	120LM/W, 150LM/W
Color temperature (K)	3000K, 4000K, 5000K, 5700K, 6500K
CRI	80CRI

Slim Profile Canopy Light

DIMENSIONS

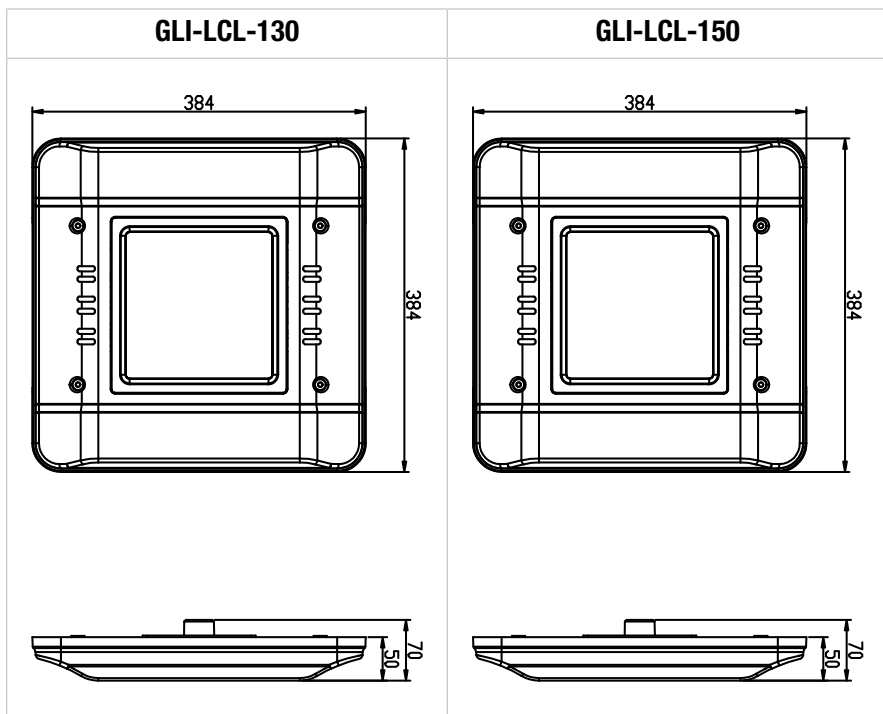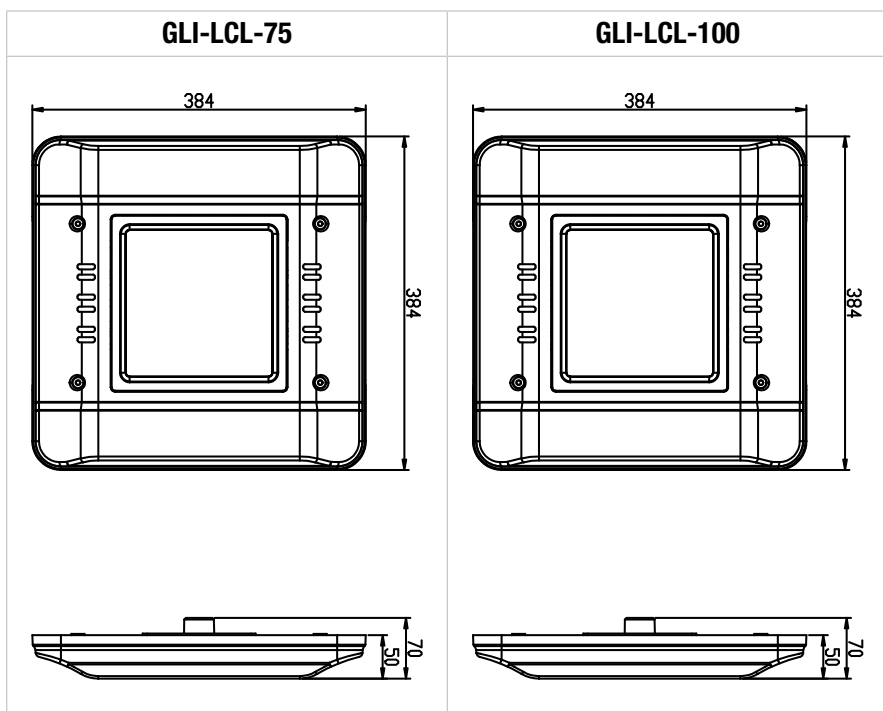

Slim Profile Canopy Light

SPECIFICATIONS

MODEL	WATTAGE	LUMENS	LUMENS/WATT	CCT	CRI	RATED LIFETIME
GLI-LCL-75-SO	75W	9000LM	120LM/W	5000K	80CRI	54 000 hours
GLI-LCL-100-SO	100W	12000LM	120LM/W	5000K	80CRI	54 000 hours
GLI-LCL-130-SO	130W	15600LM	120LM/W	5000K	80CRI	54 000 hours
GLI-LCL-150-SO	150W	18000LM	120LM/W	5000K	80CRI	54 000 hours
GLI-LCL-75-HO	75W	11250LM	150LM/W	5000K	80CRI	54 000 hours
GLI-LCL-100-HO	100W	15000LM	150LM/W	5000K	80CRI	54 000 hours
GLI-LCL-130-HO	130W	19500LM	150LM/W	5000K	80CRI	54 000 hours
GLI-LCL-150-HO	150W	22500LM	150LM/W	5000K	80CRI	54 000 hours

ORDERING GUIDE

SERIES	WATTAGE	EFFICIENCY (LM/W)	CCT
GLI-LCL			
	75 - 75W	SO - 120LM/W	30K - 3000K
	100 - 100W	HO - 150LM/W	40K - 4000K
	130 - 130W		50K - 5000K
	150 - 150W		57K - 5700K
			65K - 6500K