

Wall Pack Light

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-LWPAD

Wall Pack Light

GOLED Wall Pack Light comprises a tough integrated LED design ensuring a long-lasting life and eliminating the need for costly maintenance. GLI-LWPAD gives the option of multiple wattages to suit various illumination needs. Color temperatures such as cool, natural, and warm white. With ideal lighting and reliability safety is enhanced and accidents can be avoided.

Features and Specifications

- Heavy duty aluminum housing
- Impact resistant polycarbonate lens
- Housing enhances cooling for extended lifetime and stable operation
- Designed to be easily installed, saving time and cost
- 60° viewing angle
- Operating voltage 120V-277V-347V
- Wide range of wattages and lumens
- Choice of 25W(3500LM), 40W(5200LM), 55W(6875LM), 60W(8400LM), 80W(11200LM) and 120W(15600LM)
- CCT choice of 4000K, 5000K and 5700K
- CRI 70

Certifications

- cULus Listed
- DLC Listed
- Wet location rated

Warranty

- 5 years warranty
- Estimated lifespan of over 50 000 hours




Overview

Light source	LED
Watts (W)	25W, 40W, 55W, 60W, 80W, 120W
Voltage	120V-277V-347V
Lumen output (LM)	3500LM to 15600LM
Efficiency (LM/W)	130LM/W to 140LM/W
Color temperature (K)	4000K 5000K, 5700K
CRI	70CRI


Wall Pack Light

DIMENSIONS

25W 40W 55W

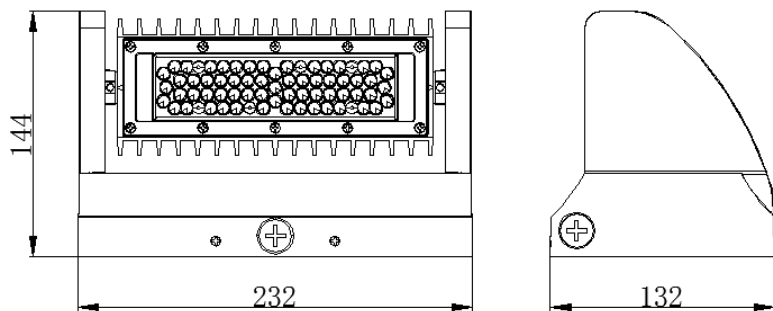

60W 80W 120W

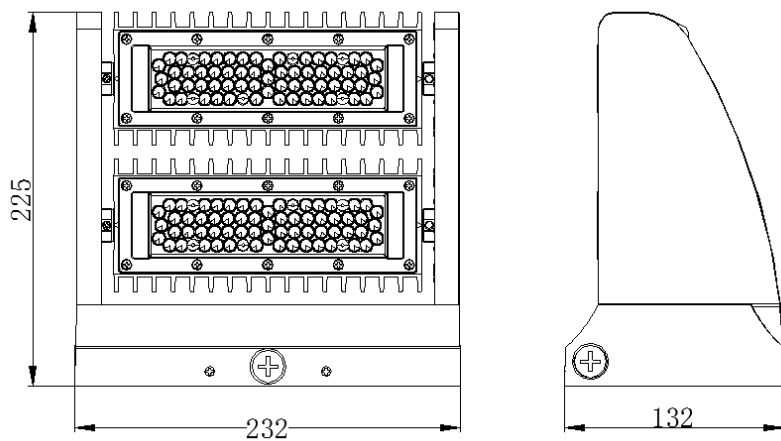

Wall Pack Light

SPECIFICATIONS

Model	WATTAGE	LUMENS	LUMENS/WATT	CCT	CRI	Rated lifetime
GLI-LWPAD-25-40K	25W	3250LM	130LM/W	4000K	70	50 000 hours
GLI-LWPAD-25-57K	25W	3500LM	140LM/W	5700K	70	50 000 hours
GLI-LWPAD-40-40K	40W	4800LM	120LM/W	4000K	70	50 000 hours
GLI-LWPAD-40-57K	40W	5200LM	130LM/W	5700K	70	50 000 hours
GLI-LWPAD-55-40K	55W	6325LM	115LM/W	4000K	70	50 000 hours
GLI-LWPAD-55-57K	55W	6875LM	125LM/W	5700K	70	50 000 hours
GLI-LWPAD-60-40K	60W	7800LM	130LM/W	4000K	70	50 000 hours
GLI-LWPAD-60-57K	60W	8400LM	140LM/W	5700K	70	50 000 hours
GLI-LWPAD-80-40K	80W	10400LM	130LM/W	4000K	70	50 000 hours
GLI-LWPAD-80-57K	80W	11200LM	140LM/W	5700K	70	50 000 hours
GLI-LWPAD-120-40K	120W	14400LM	120LM/W	4000K	70	50 000 hours
GLI-LWPAD-120-57K	120W	15600LM	130LM/W	5700K	70	50 000 hours

ORDERING GUIDE

SERIES	POWER (W)	CCT	VOLTAGE
GLI-LWPAD			
	25 - 25 Watts	40K - 4000K	V1 - 120V-277V
	40 - 40 Watts	50K - 5000K	V2 - 347V
	55 - 55 Watts	57K - 5700K	
	60 - 60 Watts		
	80 - 80 Watts		
	120 - 120 Watts		