



# Indoor/Outdoor Light OL2163

## GLI-OL21630

INSTALL AND MAINTENANCE MANUAL

### WARNING

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Turn off electrical power before installing or servicing luminaire in any way.
5. To reduce the risk of fire and overheating, make sure all connections are tight.



**May result in serious injury or death.  
Turn power OFF at circuit breaker  
prior to installation or servicing.**

# Indoor/Outdoor Light OL2163

## CAUTION

- Apply caulking around the fixture as shown in the installation instructions to prevent water ingress and leaks.
- Ensure adequate clearance around the fixture to allow for proper heat dissipation and prevent overheating.
- This fixture must be used with 120V Leading Edge (LE) or Trailing Edge (TE) phase control dimmers.
- Do not install the fixture in areas prone to standing water or submersion.
- Ensure all electrical connections, including wire nuts and junction boxes, are watertight and comply with local regulations for outdoor installations.
- Disconnect power at the circuit breaker before servicing or installing the fixture to prevent electric shock.

## INSTALLATION INSTRUCTIONS

### STEP 1


See Fig. 1.

Remove the side fixture screws to detach the mounting plate from the fixture.

### STEP 2

Secure the mounting plate to the outlet box using the provided screws.

Fig. 1

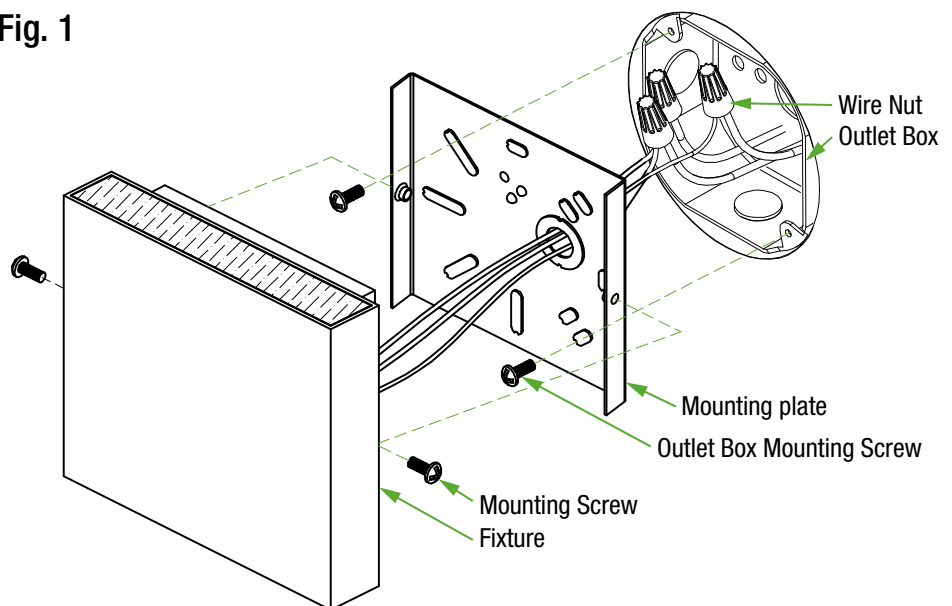

# Indoor/Outdoor Light OL2163

## INSTALLATION INSTRUCTIONS

### STEP 3

Connect the supply wires to the fixture wires using wire nuts or an equivalent connector:

- Connect ground wire (green or bare) to fixture ground wire (green or bare).
- Connect neutral (white) wire to fixture neutral (white).
- Connect hot (typically black) wire to fixture black wire.

### STEP 4

Tuck the connected wires neatly into the outlet box.

### STEP 5

Attach the fixture body to the mounting plate and secure it with the fixture screws. Ensure the lighting fixture is firmly mounted against the wall.

### STEP 6

To prevent moisture from entering the outlet box and causing a short, apply weather-resistant caulking to seal the top and sides of the fixture where it meets the wall surface. (See Fig. 2.) Leave the bottom uncaulked to allow for proper drainage and prevent moisture build-up. (See Fig. 2) The space at the bottom should be left un-caulked to prevent moisture build-up.

Fig. 2

