

Step Light Recessed

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____



GLI-SLRA

Step Light Recessed

The GOLED Step Light Recessed is a rugged contemporary stair light designed for indoor and outdoor installation. Extra elements protection ensures the product will perform long term without showing signs of weathering.

Features and Specifications

- Die cast aluminum construction
- Stainless steel hardware
- Impact resistant tempered glass
- 3mils thermoset powder coat finish provides superior resistance to corrosion and weathering
- Low profile, flush with wall face
- Various dimensions ranging in wattage from 8W(260 Luminaire Flux) to 20W(640 Luminaire Flux)
- 80CRI

Certifications

- cETLus Listed
- Damp and wet location rated
- Approved for outdoor use

Warranty

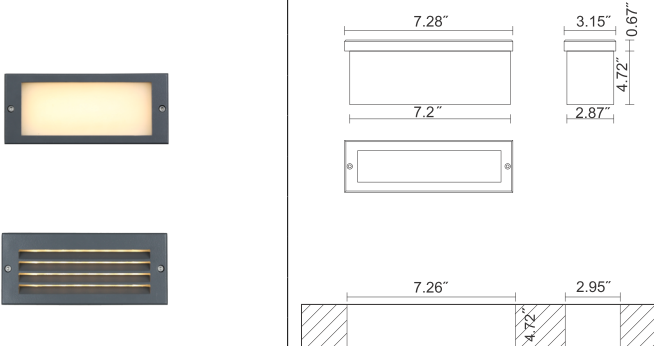
- 5 years warranty
- Estimated lifespan of over 50 000 hours

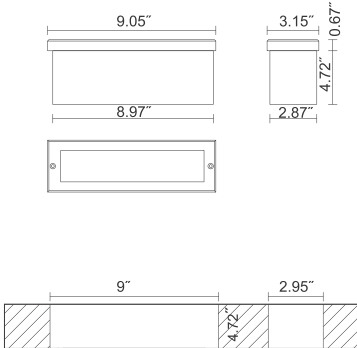


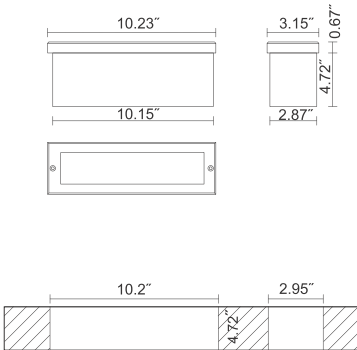
Overview

Light source	LED
Watts (W)	8W to 20W
Voltage	120V-277V
Lumen output (LUX)	260LUX to 640LUX
Efficiency (LUX/W)	32LUX/W+
Color temperature (K)	3000K, 4000K, 6000K
CRI	80+CRI


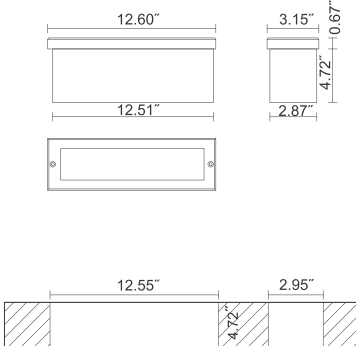
DIMENSIONS

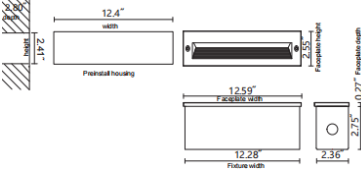
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2205		WATTAGE	6W
LUMENS		128 Luminaire Flux	
LUMENS LOUVER		60 Luminaire Flux	
HOUSING		Die-Cast Aluminum	
GASKET		Silicone Rubber	
COVER LENS		Polycarbonate Diffuse Lens	
SURFACE FINISH		Powder Coated	
DRIVER TYPE		Constant Current	
INPUT VOLTAGE		100~277V/AC	
AMBIENT TEMPERATURE		-20°C~45°C	
BEAM ANGLE		90° Diffuse / Asymmetric (Louver)	
INGRESS PROTECTION		IP65	
CERTIFICATIONS		cETLus	

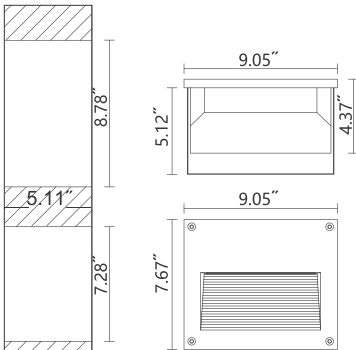
PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2207		WATTAGE	7W
		LUMENS	138 Luminaire Flux
		LUMENS LOUVER	70 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	Polycarbonate Diffuse Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	90° Diffuse / Asymmetric (Louver)
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2209		WATTAGE	8W
		LUMENS	142 Luminaire Flux
		LUMENS LOUVER	75 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	Polycarbonate Diffuse Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	90° Diffuse / Asymmetric (Louver)
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

Step Light Recessed

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2301	 	WATTAGE	10W
		LUMENS	136 Luminaire Flux
		LUMENS LOUVER	32 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	Polycarbonate Diffuse Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	90° Diffuse / Asymmetric (Louver)
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2006	 	WATTAGE	12W
		LUMENS	496 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	Polycarbonate Diffuse Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	Asymmetric
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2155	 	WATTAGE	8W
		LUMENS	260 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	PMMA Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	Asymmetric
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

Step Light Recessed

PRODUCT	DIMENSIONS	DESCRIPTION	
GLI-SLRA-2165		WATTAGE	16W
		LUMENS	104 Luminaire Flux
		HOUSING	Die-Cast Aluminum
		GASKET	Silicone Rubber
		COVER LENS	PMMA Lens
		SURFACE FINISH	Powder Coated
		DRIVER TYPE	Constant Current
		INPUT VOLTAGE	100~277V/AC
		AMBIENT TEMPERATURE	-20°C~45°C
		BEAM ANGLE	Asymmetric
		INGRESS PROTECTION	IP65
		CERTIFICATIONS	cETLus

ORDERING GUIDE

SERIES	PRODUCT CODE	FACEPLATE	CCT	COLOR
GLI-SLRA				
	2205	DF - Diffuser	30K - 3000K	BK - Black RAL9011
	2207	LV - Louver	40K - 4000K	WH - White RAL9016
	2209		60K - 6000K	GR - Gray RAL7012
	2301			MB - Mineral bronze
	2006			SI - Silver RAL9006
	2155			
	2165			

DIMMING

OPTIONS

	APPEND REQUIRED CODES
--	-----------------------

ND - No dimming

MG - Marine grade hardware

DM - 0-10V Dimming