

Universal mount cylinder light A

GLI-UMCLA

INSTALL AND MAINTENANCE MANUAL

WARNING

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Turn off electrical power before installing or servicing luminaire in any way.
5. To reduce the risk of fire and overheating, make sure all connections are tight.



**May result in serious injury or death.
Turn power OFF at circuit breaker
prior to installation or servicing.**


WARNINGS AND CAUTIONS

- **Electrical Safety:** Disconnect power at the circuit breaker before installation or maintenance to avoid electric shock.
- **Qualified Personnel:** Installation must be performed by a licensed electrician in compliance with local codes.
- **Voltage Verification:** Ensure the supply voltage matches the fixture's specifications to prevent damage.
- **Secure Mounting:** Verify that the mounting surface or structure can support the weight of the fixture.
- **Wiring Precautions:** Ensure all wiring connections are properly insulated and secure to prevent hazards.
- **Heat Dissipation:** Ensure adequate clearance around the fixture to allow for proper heat dissipation and prevent overheating.
- **Environmental Conditions:** Suitable for both indoor and outdoor use. Ensure the installation environment is free of corrosive substances.
- **Avoid Exposure:** Do not install the fixture in areas prone to prolonged submersion or extreme environmental conditions unless specifically rated for such use.

INSTALLATION

1. Drill installation holes for the fixture base and center power cable.
2. Install suitable anchors into the drilled holes.
3. Secure the fixture base using suitable fasteners.
4. Push the fixture cable through the hole in the base and connect the fixture power cable as follows
 - **Black:** Live/Hot
 - **White:** Neutral
 - **Green:** Ground
 - **Purple:** Dim+ (if applicable)
 - **Pink:** Dim- (if applicable)
5. Place the fixture over the base mounting studs and rotate it clockwise to lock it in place.

1-1

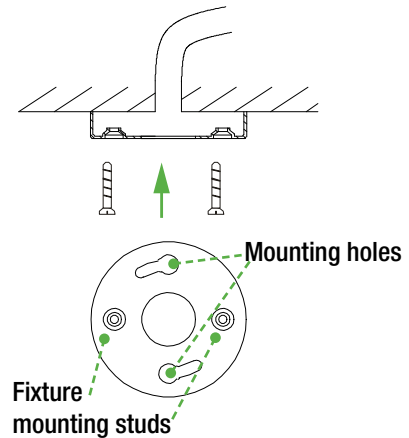

1-5

