

All-purpose Saucer Light

Project: _____ Location: _____ Type: _____

Model Number: _____ Qty: _____ Notes: _____ Date: _____




GLI-APSL

All-purpose Saucer Light

The GOLED All-purpose Saucer Light has a minimalist modern design that is ideal for offices, retail, and educational spaces. Premium optics eliminate glare to provide a comfortable light. The optional indirect and direct light distribution enriches the space illumination, adding dimension to the ceiling space. While having an intricate effect, the luminaire mounting as a pendant or surface is standard and efficacious.

Features and Specifications

- Modern minimalist design
- Aluminum housing
- Microprismatic lens provides glare free pleasant light
- Direct(down) and indirect(up) and direct(down) light distribution options
- Designed to work with standard octagon junction boxes
- Versatile installation options:
 - * Surface on ceilings and walls
 - * Aircraft cable pendant
 - * Stem pendant
- Available diameters 14Ø in, 18Ø in, 24Ø in, 36Ø in, 48Ø in
- Available wattages range from 23W(2513LM) to 132W(16155LM)
- Standard finishes include white, black, and nickel. Special order colors such as red, orange, yellow, green, and blue
- Compatible with 120-277VAC
- Standard TRIAC dimmer compatibility and 0-10V dimming
- Available in CCT 3000K/3500K/4000K , or field selectable CCT(3000K/3500K/4000K)
- 80CRI or 90CRI

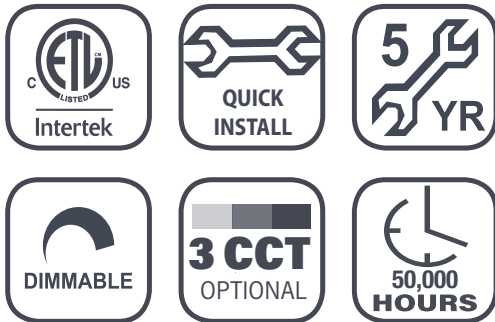

Overview

Light source	LED
Watts (W)	23W to 132W
Voltage	120-277VAC
Lumen output (LM)	2513LM to 16155LM
Efficiency (LM/W)	82-122LM/W
Color temperature (K)	3000K/3500K/4000K/3SK
CRI	80CRI, 90CRI

Certifications

- cETLus

Warranty


- 5 years warranty
- Lifespan of over 50 000 hours

All-purpose Saucer Light




▲
LOUNGE

OPEN OFFICE
▼

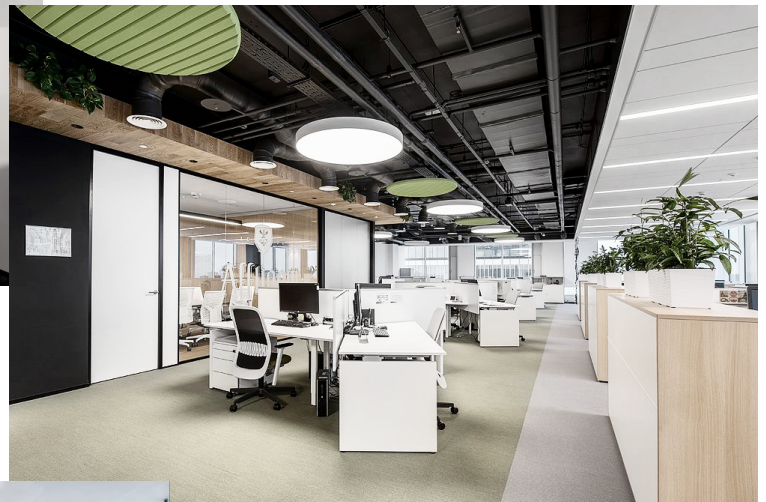


◀ LOBBY


All-purpose Saucer Light

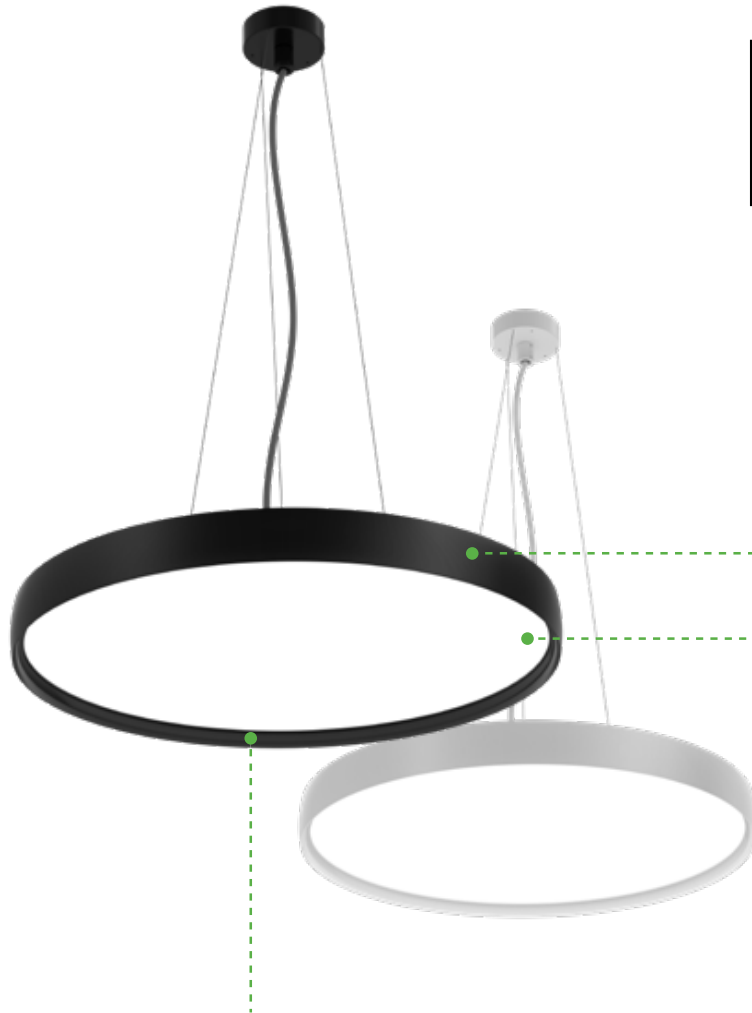

Aircraft Cable Pendant



Rod Pendant







Ceiling or Wall Mounted

70% Direct / 30% Indirect lighting distribution, High efficacy up to 120LM/W. Flicker free.


Direct light uses microprismatic lens to provide glare free pleasant light UGR<19.

Power coated finish
Available finishes:



All-purpose Saucer Light

DIMENSIONS

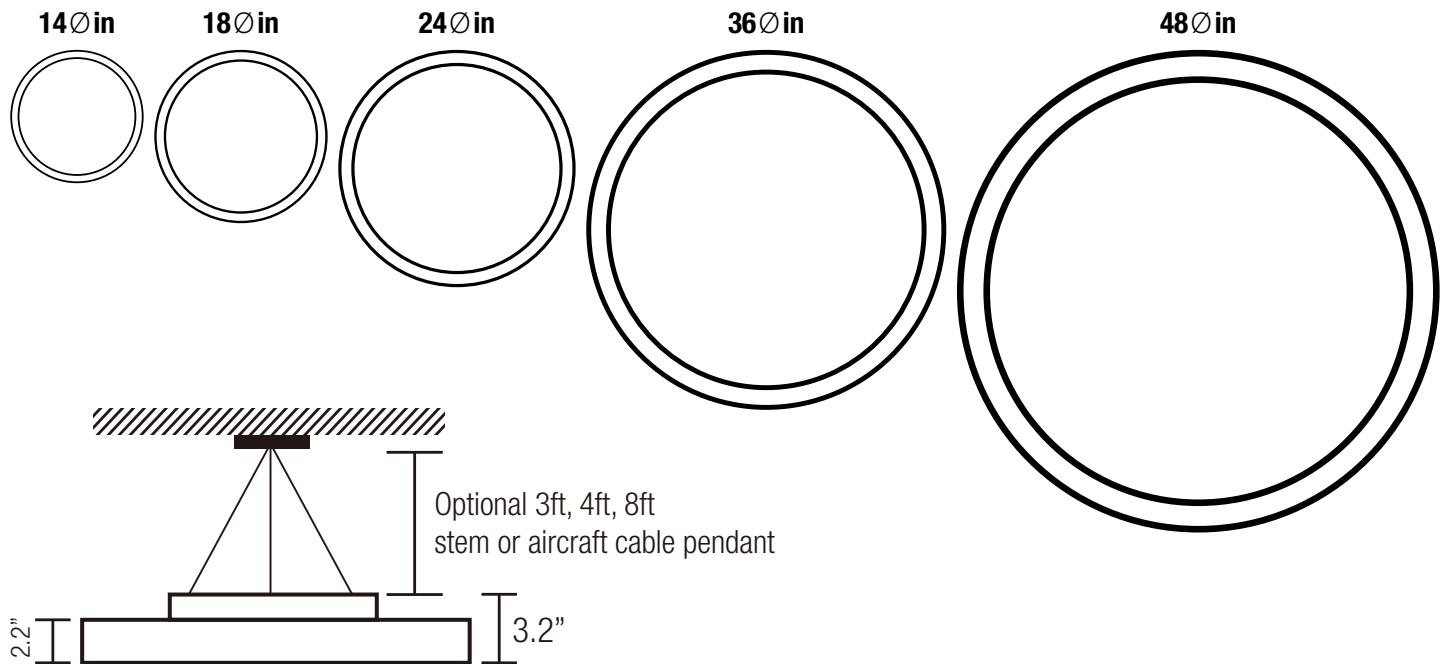

SPECIFICATIONS

CODE	DIAMETER	WATTAGE	LUMENS	LUMENS/WATT	CCT	BEAM ANGLE	CRI
GLI-APSL-DN-23W-40K	14Øin	23W	2513LM ↓	109LM/W	4000K	↓90°	80+
GLI-APSL-DN-28W-40K	18Øin	28W	2815LM ↓	101LM/W	4000K	↓90°	80+
GLI-APSL-DN-40W-40K	18Øin	40W	3944LM ↓	99LM/W	4000K	↓90°	80+
GLI-APSL-DN-48W-40K	24Øin	48W	5079LM ↓	106LM/W	4000K	↓90°	80+
GLI-APSL-DN-62W-40K	24Øin	62W	6165LM ↓	99LM/W	4000K	↓90°	80+
GLI-APSL-DN-80W-40K	36Øin	80W	9079LM ↓	114LM/W	4000K	↓90°	80+
GLI-APSL-DN-100W-40K	36Øin	100W	11658LM ↓	117LM/W	4000K	↓90°	80+
GLI-APSL-DN-108W-40K	48Øin	108W	13056LM ↓	121LM/W	4000K	↓90°	80+
GLI-APSL-DN-132W-40K	48Øin	132W	16155LM ↓	122LM/W	4000K	↓90°	80+
GLI-APSL-UD-28W-40K	14Øin	28W	1597LM ↓ + 684LM ↑	82LM/W	4000K	↓90° ↑120°	80+
GLI-APSL-UD-40W-40K	18Øin	40W	2764LM ↓ + 1185LM ↑	99LM/W	4000K	↓90° ↑120°	80+
GLI-APSL-UD-50W-40K	18Øin	50W	3565LM ↓ + 1528LM ↑	102LM/W	4000K	↓90° ↑120°	80+
GLI-APSL-UD-54W-40K	24Øin	54W	4222LM ↓ + 1809LM ↑	112LM/W	4000K	↓90° ↑120°	80+
GLI-APSL-UD-62W-40K	24Øin	62W	1809LM ↓ + 1976LM ↑	106LM/W	4000K	↓90° ↑120°	80+
GLI-APSL-UD-100W-40K	36Øin	100W	8055LM ↓ + 3452LM ↑	115LM/W	4000K	↓90° ↑120°	80+
GLI-APSL-UD-123W-40K	36Øin	123W	9992LM ↓ + 4281LM ↑	116LM/W	4000K	↓90° ↑120°	80+
GLI-APSL-UD-114W-40K	48Øin	114W	9556LM ↓ + 4095LM ↑	120LM/W	4000K	↓90° ↑120°	80+
GLI-APSL-UD-132W-40K	48Øin	132W	11309LM ↓ + 4846LM ↑	122LM/W	4000K	↓90° ↑120°	80+

All-purpose Saucer Light

ORDERING GUIDE

SERIES	LIGHT DISTRIBUTION	WATTAGE/SIZE	CCT	CRI	CONTROL	FINISH
GLI-APSL						
		23W - 23 Watts 14Øin	30K - 3000K	80C - 80CRI	DM - 0-10V	WH - White
		28W - 28 Watts 18Øin	35K - 3500K	90C - 90CRI	TR - Standard TRIAC	BK - Black
		40W - 40 Watts 18Øin	40K - 4000K		NC - No control	SI - Silver
		48W - 48 Watts 24Øin	3SK - 3CCT select			RD - Red
	DN - Down	62W - 62 Watts 24Øin				OR - Orange
		80W - 80 Watts 36Øin				YL - Yellow
		100W - 100 Watts 36Øin				GN - Green
		108W - 108 Watts 48Øin				BL - Blue
		132W - 132 Watts 48Øin				
		28W - 28 Watts 14Øin				
		40W - 40 Watts 18Øin				
		50W - 50 Watts 18Øin				
		54W - 54 Watts 24Øin				
	UD - Up and Down	62W - 62 Watts 24Øin				
		100W - 100 Watts 36Øin				
		123W - 123 Watts 36Øin				
		114W - 114 Watts 48Øin				
		132W - 132 Watts 48Øin				

MOUNTING

- SM** - Surface mount
- AM3** - Aircraft cable mount 3'
- AM4** - Aircraft cable mount 4'
- AM8** - Aircraft cable mount 8'
- PM3** - Stem pendant mount 3'
- PM4** - Stem pendant mount 4'
- PM8** - Stem pendant mount 8'